
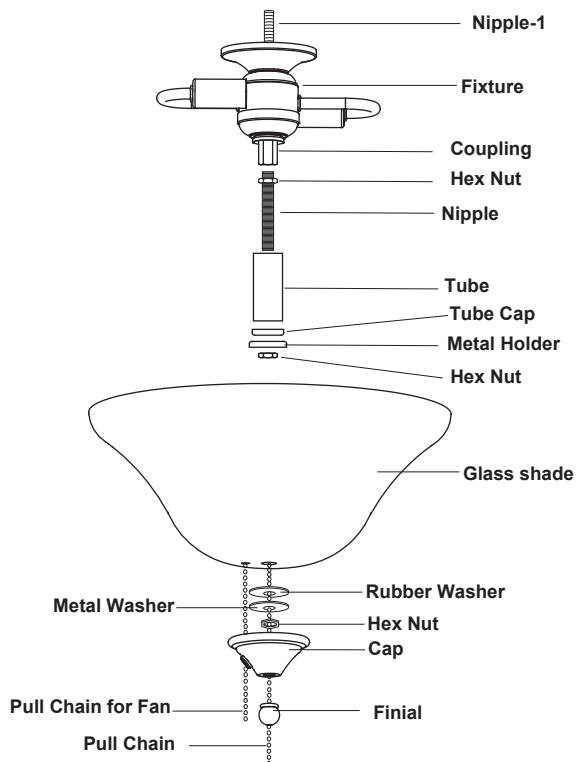
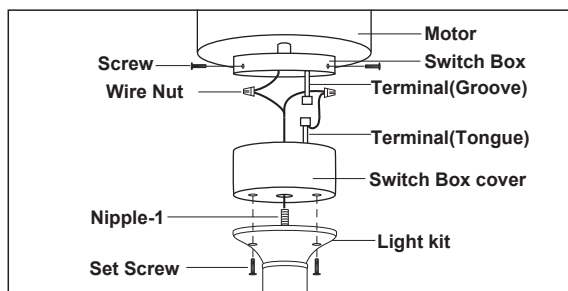


ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK40112/LK40162

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK. BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1.Before installing, consult local electrical codes for wiring and grounding requirements.
2.The combined weight of your ceiling fan and light kit can not exceed 35 pounds unless additional support is provided for the fan.

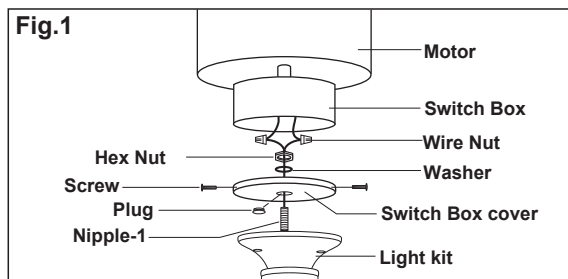

Installation Steps

1. Remove the switch box cover from the fan by loosening 3 screws.
2. Unscrew and discard the plug from the switch box cover.
3. Attach the light kit to the switch box cover.
***For fans of the Fig.1, please attach the nipple-1 of the light kit to the hole of the switch box cover, and then thread the wires through the washer and hex nut, and secure tightly.
***For fans of the Fig.2, please attach the nipple-1 of the light kit to the hole in the center of the switch box cover, and then secure with 2 set screws to the switch box cover.
4. Make wire connections with the wire nuts:
---Connect black or blue wire from light kit to blue wire from the fan.
---Connect white wire from light kit to white wire from the fan.
Carefully tuck wires back into the switch box cover.
5. Install the Nipple to the Coupling and adjust the length with the Hex Nut.
6. Install the Tube, Tube Cap and Metal Holder into the Nipple by the Hex Nut.
7. Reinstall the switch box cover with the 3 screws.
8. Install bulbs.(Please do not exceed the maximum capacity which is recommended on the package.)
9. Thread the pull chain through the glass shade, rubber washer, metal washer and hex nut in order, and secure with the hex nut to the nipple.
10. Thread the pull chain through the cap and finial, and secure with the finial to the nipple.
11. Thread the pull chain of the fan through the glass shade and the cap.
*** Make sure the hole of glass shade and the hole of the cap for fan was match.
12. Turn on the power at fuse or circuit box.

For Ceiling Light: (See Fig.1)

1. Take out the canopy set from the hardware package for ceiling light.
2. Thread the fixture wires through the canopy set. Secure the canopy set onto nipple(-a) by using the coupling.
4. Attach two screws to the mounting strap, then secure them with two lock nuts. Adjust the length of the screws if necessary.
5. Attach the mounting strap to the outlet box by using two mounting screws.
6. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from fixture to the black wire from the outlet box.
 - The white wire from fixture to the white wire from the outlet box.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully tuck the wires back into the outlet box.
7. Attach canopy to the mounting strap by inserting the screws, then secure them with the bolt nuts.
8. Follow steps 7~9 as for Light Kit.

